


# McKenzie Alder Bookcase Door Kits


**AEGAC = Glazed Antique Cherry finish; AEGSP = Glazed Spice finish;**

**AECAF = Caffè finish**

*Assembly Instructions*



**2000**  
AEGAC  
AEGSP  
AECAF  
**24" Alder  
Bookcase  
2-Door Kit**

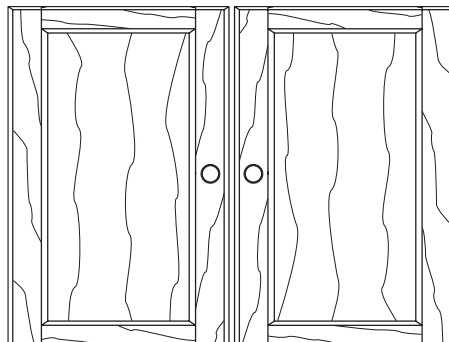


**2001**  
AEGAC  
AEGSP  
AECAF  
**36" Alder  
Bookcase  
2-Door Kit**

**2003**

AEGAC  
AEGSP  
AECAF

**30" Alder  
Bookcase  
2-Door Kit**

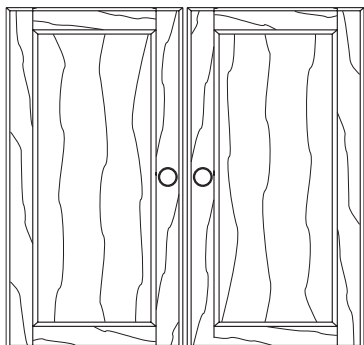

## ***Congratulations!***

*This fine piece of furniture will make a gorgeous addition to your home. For the best results, read the Assembly Instructions before you begin your project.*



## **IMPORTANT NOTES:**

- For normal household use only. **Not** recommended for commercial use.
- Do not climb, sit or stand on this piece of furniture.
- Before you begin your project, completely read the Assembly Instructions.
- Store this item: 1- in its box; 2- in a dry place; 3- in temperatures that range from 40°F to 90°F (not on a cold and possibly damp cement floor).
- Periodically inspect your furniture for any loose glue joints, screws or any other problem that might affect the stability of your furniture. Tighten or repair as needed.

**DESIGN SUBJECT TO CHANGE WITHOUT NOTICE.**



**CALL US FIRST!** *Do not return this item to the store.*

**Service Policy:** We will replace any part that is defective, missing or damaged during assembly. Please contact Whittier Wood Products customer service department directly by phone, fax, mail or email for a replacement part.

**Hours:** Our friendly customer service staff can be reached Monday-Friday 7:00 a.m. to 5:00 p.m. (Pacific Time). You may leave a message 24 hours a day, seven days a week.

**To Order:** Designate the finish, provide the furniture model number, the part letter, production code, quantity needed, reason for replacement, your full name, address and telephone number.

*Parts ship from our Eugene, Oregon factory within one or two business days from the time we receive your request. Please allow five to ten business days for delivery.*

**800-653-3336** • Outside the U.S. or Canada: 541-687-0213 • Fax: 541-687-2060  
www.whittierwood.com • P.O. Box 2827 • Eugene, Oregon 97402, U.S.A.

**Whittier  
Wood**  
FURNITURE

P.O. Box 2827  
Eugene, OR 97402 USA


Production Code:

02/10


# Glazed Antique Cherry finish (AEGAC) & Glazed Spice finish (AEGSP) & Caffè finish (AECAF) 2000; 2001; 2003 Door Kit — Parts List

Before you begin to assemble this unit, identify each part and make sure the quantities received match what is on this list.  
If you need to replace a part, please refer to the following list for the part name and letter code.

---

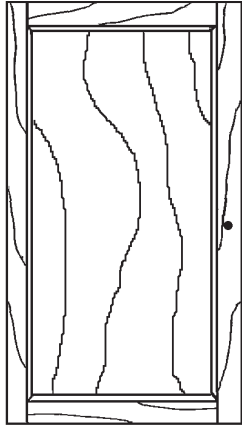

A — Door — Qty. 2



B — Door Knob — Qty. 2



C — #8x1-1/2" Machine Screw — Qty. 2



D — Hinge — Qty. 4



E — Hinge Plate — Qty. 4



F — Pad — Qty. 2

# Glazed Antique Cherry finish (AEGAC) & Glazed Spice finish (AEGSP) & Caffè finish (AECFAF) 2000; 2001; 2003 Alder Bookcase Door Kit — Assembly Instructions

Tool required: Phillips Screwdriver

---

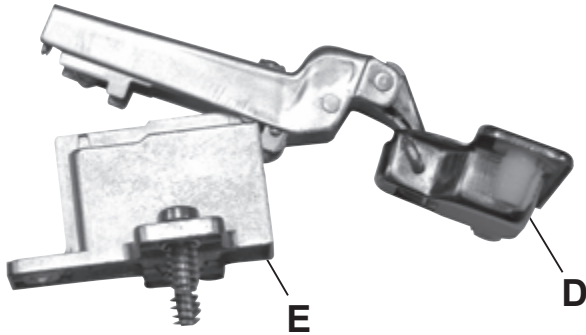


Fig. 1

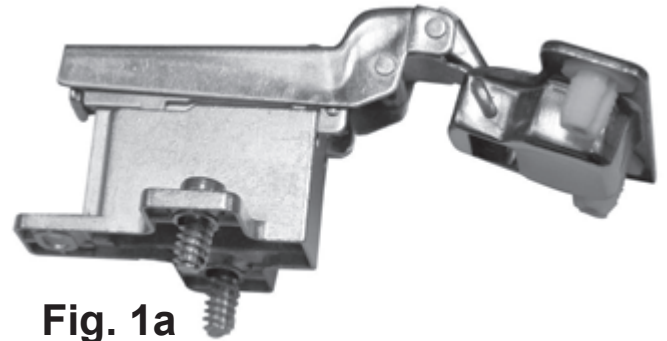


Fig. 1a

1. Lay the Doors (A) face down on a clean protected surface. Snap the handle of the Hinge (D) down on to each of the Hinge Plates (E) as seen in Figures 1 and 1a.
- 

2. There are predrilled holes in the door as shown in Figure 2. This is where you will be inserting the hinge part of the assembly. Insert the Hinge (D) assembly that has the plastic knobs into the predrilled holes in the bottoms and tops of the Doors (A). See Figures 2 and 2a. **You must place both Hinges into the Door before you attach them to the bookcase.**

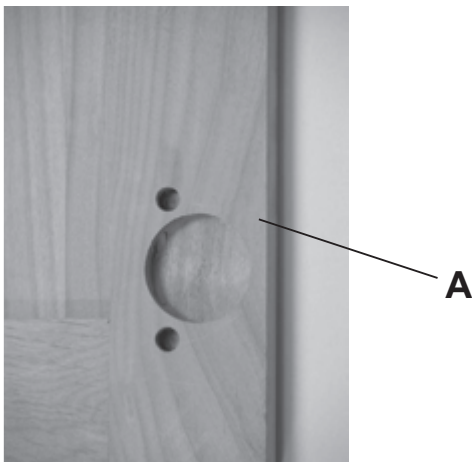


Fig. 2

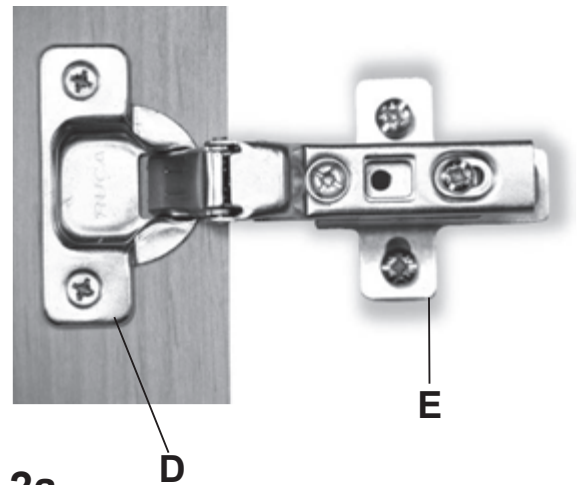


Fig. 2a



**Fig. 3**

Bottom


Center  
shelf



**Fig. 3a**

3. Attach the door to the bookcase by inserting the screws in the Hinge Plate (E) into the second and third holes up from the bottom of the bookcase unit. See Fig. 3. Attach the second hinge assembly to the same door/bookcase by inserting screws into the third and fourth predrilled holes down from the top of the fixed center shelf. See Figure 3a.


- 
4. The door might need to be adjusted so that all the spaces between the doors and unit sides are equal. To make those adjustments, follow the instructions in Figure 4.

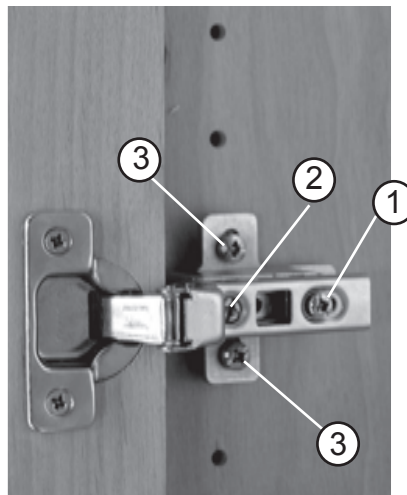

**Fig. 4**

- Side adjustment** To move the door towards the side panel, rotate screw '2' counter-clockwise. To move it away, rotate screw '2' clockwise.
- Depth adjustment** Loosen screw '1' and adjust door. Re-tighten screw.
- Height adjustment** Loosen screws '3' and adjust door. Re-tighten screws.

5. Attach the Knobs (B) to the Doors (A) with #8x1-1/2 " Machine Screws (C). See Figure 3.

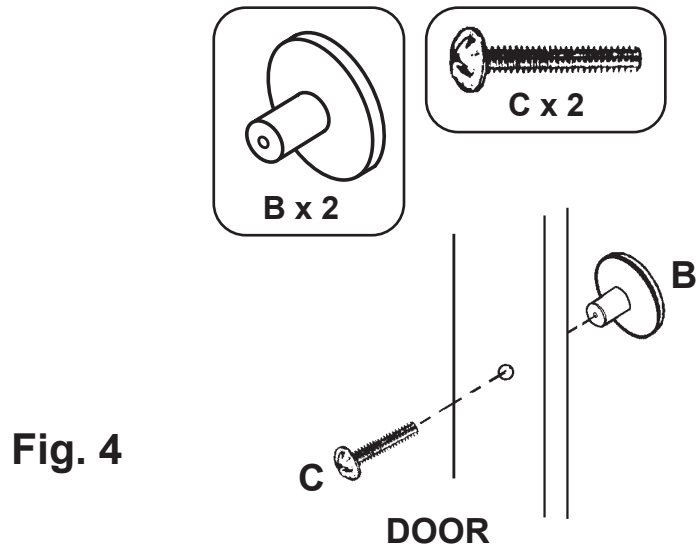

6. Attach a Pad (F) to the back of each door where it comes in contact with the adjustable shelf.

